

PPC-Z1564P/R

15" IP66/69K Stainless Steel Panel PC with Intel® Celeron® J6412 Processor



Applications

- Food & Beverage Processing
- Hospitality & Catering Service
- Pharmaceutical Equipment
- Animal Feed Production
- Chemical Critical Environment

Features

- 15" 1024 x 768 Resolution, 350nits Panel
- Intel® Celeron® J6412 onboard Processor
- True Flat, Easy-to-clean Front Panel Design
- Grade 304 Stainless Steel Enclosure (Grade 316L for option)
- IP66/69K Rated with M12 Connectors
- Support Projected Capacitive and Resistive Touch
- Support VESA, Yoke, and Wall Mounting

Ordering Information

Part No.	Description
PPC-Z1564P	15" 4:3 (1024 x 768) XGA, 350nits, P-CAP Touch, Full Stainless Steel 304, Intel® Celeron® J6412, M12 Connectors (2 x GbE, 2 x RS232/422/485, 1 x USB3.2, 1 x USB2.0 (x2), 12~36VDC)
PPC-Z1564R	15" 4:3 (1024 x 768) XGA, 350nits, 5-wire Resistive Touch, Full Stainless Steel 304, Intel® Celeron® J6412, M12 Connectors (2 x GbE, 2 x RS232/422/485, 1 x USB3.2, 1 x USB2.0 (x2), 12~36VDC)

Packing List

Description

1 x PPC-Z1564P/R


Optional Items

Part No.	Description
EA-PS-90W12VM12xx-0010	Adapter AC/DC 12V 7.5A 90W with M12 Connector (EU)
EA-PS-90W12VM12xx-0110	Adapter AC/DC 12V 7.5A 90W with M12 Connector (US)
AKT-USB2M12	M12 Connector to 2-port USB2.0 Cable, 2m
AKT-USB31M12	M12 Connector to USB3.0 Cable, 1.8m
AKT-COM2M12	M12 Connector to DB9 Cable, 2m
AKT-LAN2M12	M12 Connector to LAN Cable, 2m
AWD-WF006	Wi-Fi 802.11 a/b/g/n/ac/BT4.0 (2T2R) + 2 IP66 Antennas (Dual Band), Half Size
AWD-WF007	Wi-Fi 802.11 b/g/n/BT4.0 (1T1R) + 1 IP66 Antenna (Dual Band), Half Size
ACS-Z150-SWM	Stainless Steel 304 Wall Mount Kits, Thickness 3mm for PPC-Z15XX
ACS-Z150-SYK	Stainless Steel 304 Yoke Mount Kits, Thickness 3mm for PPC-Z15XX
UPS-60W-4S1P	Super Cap UPS Backup System


Specifications

Model		PPC-Z1564P		PPC-Z1564R	
Processor System	CPU	Intel® Celeron® J6412 Processor			
	Frequency	up to 2.60GHz			
	BIOS	UEFI			
	TPM	fTPM			
Memory	Technology	Dual Channel DDR4 3200MHz (un-buffered and non-ECC)			
	Max. Capacity	Support up to 32GB			
	Type	2 x 260-pin SO-DIMM			
Panel	Panel Type	15" XGA LCD			
	Aspect Ratio	4:3			
	Resolution	1024 x 768			
	Brightness	350cd/m²			
	Color	16.2M			
	Contrast Ratio	2500:1			
	Viewing Angle	176 (H) x 176 (V)			
	Backlight MTBF (typ.)	70,000Hrs			
Touchscreen	Touchscreen Type	Projected Capacitive (P-CAP)		5-wire Resistive	
	Surface Hardness	7Mohs		3Mohs	
	Transparency	90% (±3%)		80% (±3%)	
I/O Interface	Ethernet	2 x GbE (Intel® I210-AT) (M12 Connector)			
	Serial Port	2 x RS-232/422/485 (M12 Connector)			
	USB	2 x USB2.0 (from 1 x M12 Connector) 1 x USB3.2 Gen1 (M12 Connector)			
	Audio	N/A			
Storage	2.5" SSD	Internal 1 x 2.5" SSD			
	M.2	Internal 1 x M.2 2280 M-Key (PCIe x2, SATA)			
Expansion	Mini-PCIe	1 x Full-Size Mini-PCIe with SIM slot (PCIe, USB2.0 and SIM)			
	M.2	1 x M.2 2280 M-Key (PCIe x2, SATA)			
Power	Power Mode	AT/ATX			
	Power Supply Voltage	12~36V DC Input			
	Power Connector Type	M12 Connector			
UPS Backup System (Optional)	Type	Super Cap UPS			
	Max. Discharge Power	60W			
	Backup time @20W	110 sec.			
Environment	Operating Temperature	-10C ~ +60°C			
	Storage Temperature	-30C ~ +70°C			
	Humidity	10% ~ 95%, Non-condensing			
	Vibration	IEC 60068-2-64: 1.5Grms, random, 5~500 Hz, 1hr/axis			
	Shock	IEC 60068-2-27: 15G, half-sine, 11ms duration			
General	Certification	CE/FCC Class A			
	Ingress Protection	Full System IP66/69K			
	Material	Full SUS304 Stainless Steel (Optional SUS316L)			
	Mounting	VESA (100 x 100mm) / Yoke / Wall			
	Dimensions (W x H x D)	435 x 338 x 66.5mm			
	Net Weight	7.45kg			
	Operating System	Windows 10 IoT, Windows 11 (IoT/Professional), Linux			

PPC-Z1564P Dimension

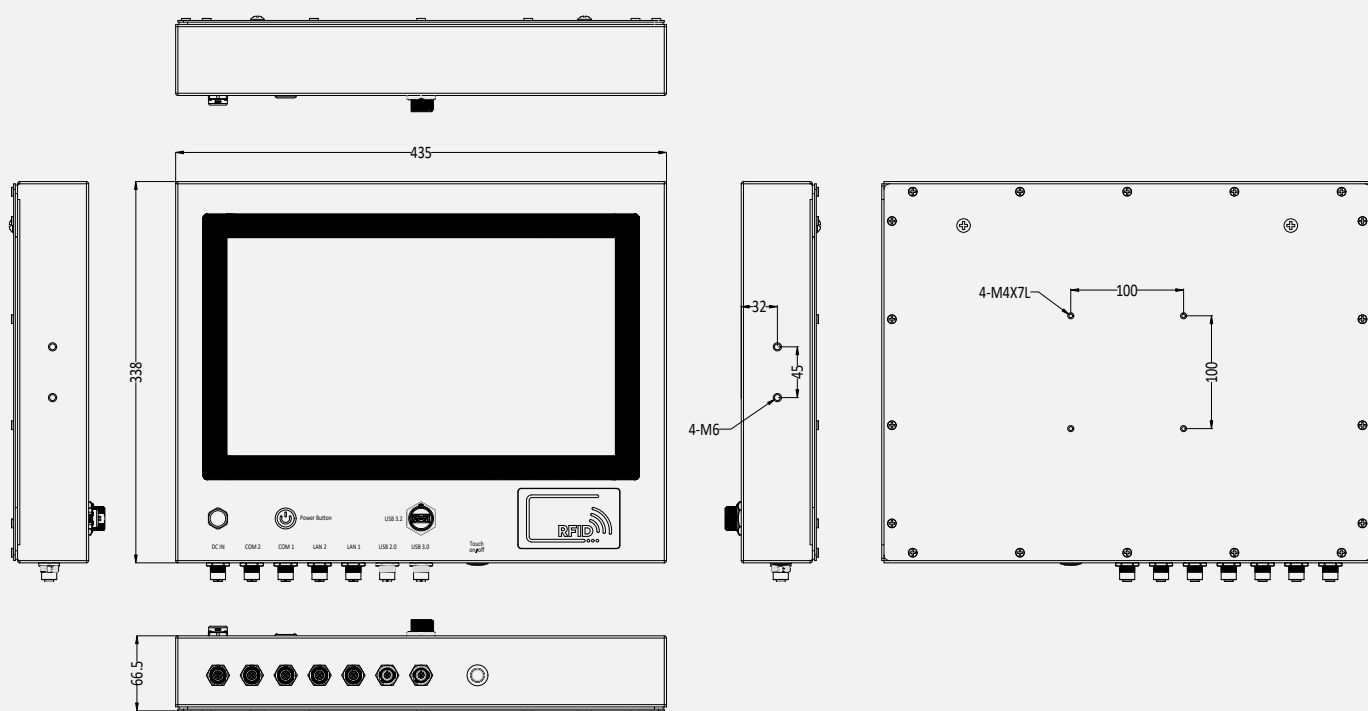

PPC-Z1564R Dimension

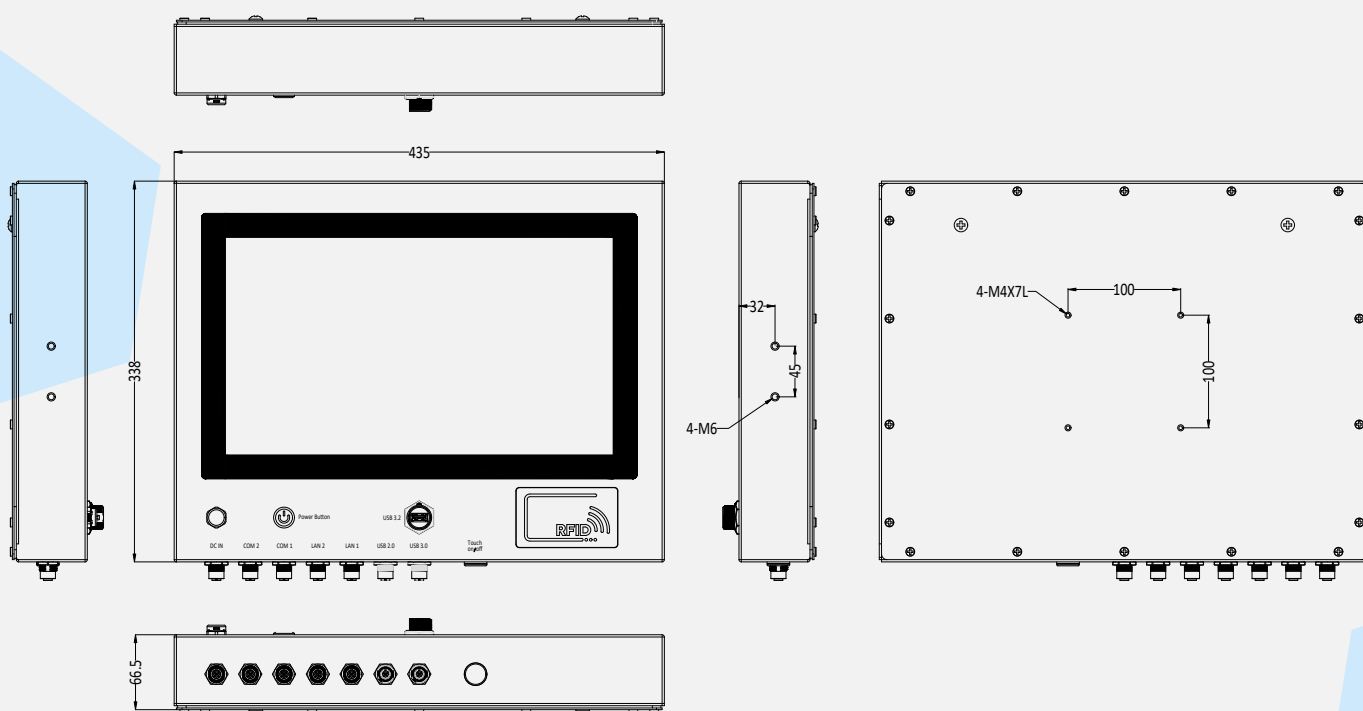

Viewing



Website Version (勿動)

Model		PPC-Z1564P	PPC-Z1564R
Processor System	CPU	Intel® Celeron® J6412 Processor	
	Frequency	up to 2.60GHz	
	BIOS	UEFI	
	TPM	fTPM	
Memory	Technology	Dual Channel DDR4 3200MHz (un-buffered and non-ECC)	
	Max. Capacity	Support up to 32GB	
	Type	2 x 260-pin SO-DIMM	
Panel	Panel Type	15" XGA LCD	
	Aspect Ratio	4:3	
	Resolution	1024 x 768	
	Brightness	350cd/m ²	
	Color	16.2M	
	Contrast Ratio	2500:1	
	Viewing Angle	176 (H) x 176 (V)	
	Backlight MTBF (typ.)	70,000Hrs	
Touchscreen	Touchscreen Type	Projected Capacitive (P-CAP)	5-wire Resistive
	Surface Hardness	7Mohs	3Mohs
	Transparency	90% (±3%)	80% (±3%)
I/O Interface	Ethernet	2 x GbE (Intel® I211-AT) (M12 Connector)	
	Serial Port	2 x RS232/422/485 (M12 Connector)	
	USB	2 x USB2.0 (from 1 x M12 Connector) 1 x USB3.2 Gen1 (M12 Connector)	
	Audio	N/A	
Storage	2.5" SSD/HDD	Internal 1 x 2.5" SSD/HDD	
	M.2	Internal 1 x M.2 2280 M-Key (PCIe x2, SATA)	
Expansion	Mini-PCIe	1 x Full-Size Mini-PCIe with SIM slot (PCIe, USB2.0 and SIM)	
	M.2	1 x M.2 2280 M-Key (PCIe x2, SATA)	
Power	Power Mode	AT/ATX	
	Power Supply Voltage	12~36V DC Input	
	Power Connector Type	M12 Connector	
UPS Backup System (Optional)	Type	Super Cap UPS	
	Max. Discharge Power	60W	
	Backup time @20W	110 sec.	
Environment	Operating Temperature	-10C ~ +60°C	
	Storage Temperature	-30C ~ +70°C	
	Humidity	10% ~ 95%, Non-condensing	
	Vibration	2.16Grms, 5 - 500Hz, 0.5hr/axis	
	Shock	20G, half sine, 11ms	
General	Certification	CE/FCC Class A	
	Ingress Protection	Full System IP66/69K	
	Material	Full SUS304 Stainless Steel (Optional SUS316)	
	Mounting	VESA (100 x 100mm) / Yoke / Wall	
	Dimensions (W x H x D)	435 x 350 x 66.5mm	
	Net Weight	7.45kg	
	Operating System	Windows 10 IoT, Windows 11 (IoT/Professional), Linux	