

# PPC-152

**Arestech**

15" Fanless Multi-touch Panel PC with  
Intel® Celeron® J1900 Processor



## Features

- 15" TFT XGA LED Panel with Projected Capacitive Touch Display
- Embedded Intel® Celeron® J1900 2.0 GHz Processor
- System Memory up to 8 GB DDR3L 1333 SDRAM
- Supports Two-finger Touch Control while Wearing
- Gloves Internal SATA 2.5" HDD and mSATA Socket
- Panel and VESA Mounting

## Applications

- Human Machine Interface (HMI)
- Factory / Manufacturing Automation
- ATM / Self-service / Kiosk Applications
- Vending Machine / Ticketing Machine

## → Packing List

Description
1 x PPC-152
1 x Driver CD
1 x Power Adapter (AC-to-DC, 12 V @ 5 A, 60 W)
6 x Panel Mounting Screws


## → Optional Items

Part No.	Description
ACS-PS-US	Power Cable 3-pin, 180 cm, USA Type
ACS-PS-EU	Power Cable 3-pin, 180 cm, Euro Type
ACS-PS-CN	Power Cable 3-pin, 180 cm, China Type
ACS-100-STD	VESA Table Stand

## → Ordering Information

Part No.	Description
PPC-152P-A1	15" Fanless Projected Capacitive Touch Panel PC with Intel® Celeron® J1900 2.0 GHz Processor
PPC-152R-A1	15" Fanless 5-wire Resistive Touch Panel PC with Intel® Celeron® J1900 2.0 GHz Processor

## → Dimensions

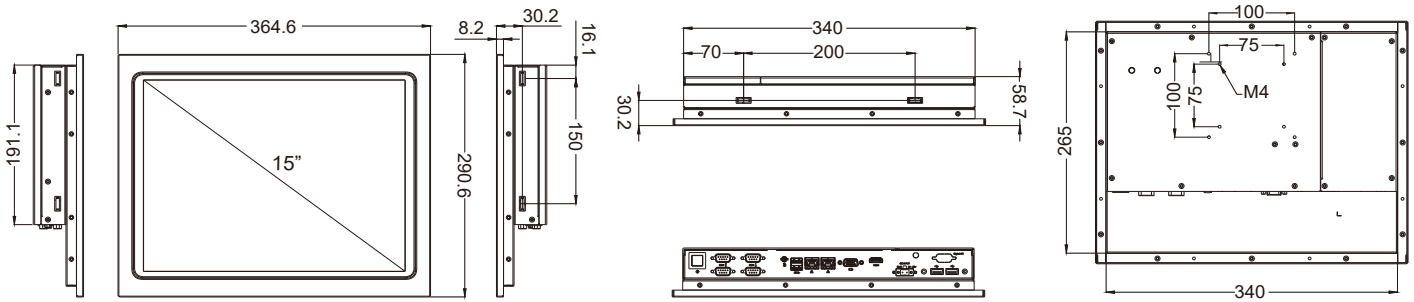

Cut out : 342\*267mm

## → Specifications

Model		PPC-152P	PPC-152R
Processor System	CPU	Intel® Celeron® Processor J1900	
	Frequency	Quad-Core up to 2.0 GHz	
	L2 Cache	2 MB	
	System Chipset	N/A	
	BIOS	UEFI	
Memory	Technology	DDR3L 1333 MHz SDRAM	
	Max. Capacity	8 GB	
	Socket	1 (204-pin SO-DIMM)	
Display	Panel Size	15" LED Panel	
	Resolution	1024 x 768 (XGA)	
	Viewing Angle	80 x 80 (H) x 80 x 80 (V)	
	Brightness	300 (cd/m <sup>2</sup> )	
	Color Support	16.7M	
	Contrast Ratio	600:1	
	Response Time	8 (msec)	
	VGA	Up to 1920 x 1200	
	HDMI	HDMI 1.4a up to 1920 x 1200	
	Dual Display	LCD + VGA or LCD + HDMI	
Touchscreen	Touchscreen Type	Projected Capacitive	5-Wire Resistive
	Surface Hardness	7 Mohs	3 Mohs
	Durability	-	36 millions times
	Transparency	90% (±3%)	80% (±3%)
I/O Interface	USB	2 USB 3.0, 2 USB 2.0	
	Serial Port	4 COM (3 RS-232, 1 RS-232/422/485)	
	Digital I/O	8-pin Digital I/O (DB-9 connector)	
	Expansion	2 Mini PCIe (1 full-size Mini PCIe or mSATA, selected by jumper setting; 1 half-size Mini PCIe)	
Ethernet	Controller	Dual GbE, 10/100/1000 Mbps (Realtek RTL8111G-CG)	
Audio	Chipset	Realtek ALC662 High Definition Audio (HD)	
	Connector	Line out	
Storage	mSATA	Supports either mSATA or full-size Mini PCIe, selected by jumper setting	
	SATA II	1 Internal 2.5" HDD/SSD	
Power	Power Supply Voltage	Supports 9-36 V DC input (Phoenix Connector)	
	Power Adaptor	AC-to-DC, 12 V @ 5 A, 60 W	
	Power Consumption (Typical)	1.53 A @ 12 V (18.4 W)	
	Power Consumption (Max.)	1.8 A @ 12 V (21.6 W)	
	Battery	Lithium 3 V / 210 mAh	
Environment	Operating Temperature	0~50° C (32~122° F) w/ 2.5" SSD	
	Storage Temperature	-40~85° C (-40~185° F)	
	Humidity	5~95% @ 40° C, non-condensing	
	Vibration	5-500 Hz, 0.026 G <sup>2</sup> /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis	
	Certification	CE, FCC Class A	
General	Ingress Protection	IP54	
	Dimensions (L x W x H)	364.6 x 290.6 x 58.7 mm (14.35" x 11.44" x 2.31")	
	Weight	4.37 kg (9.6 lb)	4.31 kg (9.5 lb)
	Operating System	Windows 7/8.1/10, WES7-E/P, WE8S, Ubuntu 14.04	